


KINETIC AIR VALVE (DK / H-42K)

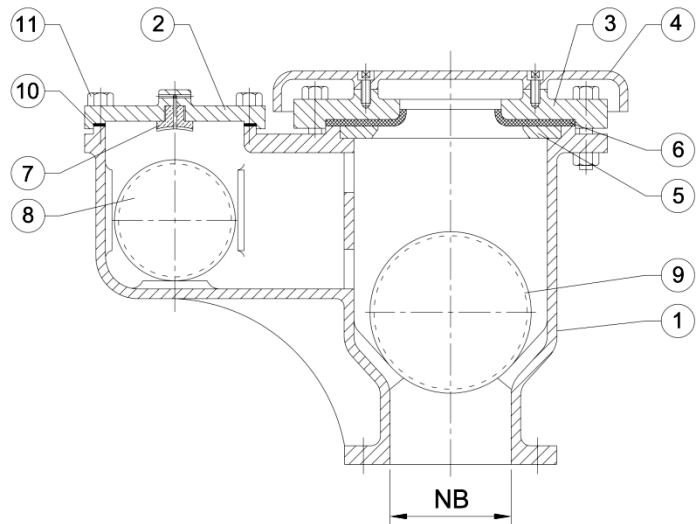

SL. No.	DESCRIPTION	MATERIAL
1	BODY	CI / DI / SS
2	HIGH PRESSURE COVER	CI / DI / SS
3	LOW PRESSURE COVER	CI / DI / SS
4	COWL	CI / DI / SS
5	JOINT SUPPORT RING	CI / DI / SS
6	L.P. SEAT RING	NATURAL RUBBER
7	H.P. ORIFIC PLUG	LT BRONZE / SS
8	BALL FOR H.P. CHABER	SOFT RUBBER COAQTED SEASONED TIMBER / SS
9	BALL FOR H.P. CHABER	HARD VULCANITE COATED SEASONED TIMBER / SS
10	H.P. COVER GASKET	NATURAL RUBBER
11	BOLTS & NUTS	CARBON STEEL / SS

DESIGN FEATURES	
SIZE RANGE	40 mm to 200 mm
PRESSURE RATING	PN 1.0, PN 1.6
DESIGN STANDARD	IS: 14845 (DK) / G&K (H-42K)
TESTING STANDARD	IS: 14845
FLANGE ENDS	BS / IS / ANSI / DIN
MATERIAL	CI / DI / SS

HYDROSTATIC TEST PRESSURE (Kg/Cm ²)		
RATING	BODY	SEAT
PN 1.0	15	10
PN 1.6	24	16

*Attached separate dimension table.