
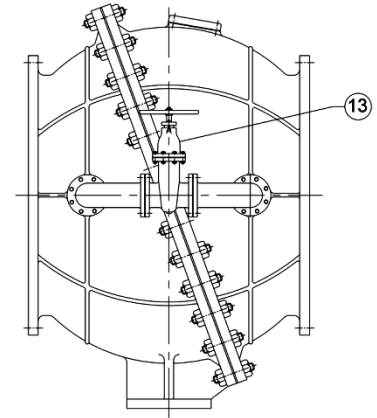


MULTI DOOR NON RETURN VALVE

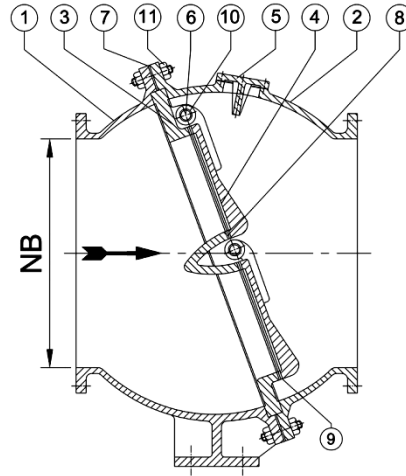

SL. No.	DESCRIPTION	MATERIAL
1	BODY (INLET)	CI / DI / CS
2	BODY (OUTLET)	CI / DI / CS
3	DIAPHRAGM	CI / DI / CS
4	DOOR (04 Nos.)	CI / DI / CS
5	STOPPER	CI / DI / CS
6	HINGE PIN / DOOR PIN	SS: 410 / 304 / 316 / 431 / IS: 6603
7	GASKET	RUBBER
8	BODY / DIAPHRAGM SEAT	LT BRONZE / SS / RUBBER NICKEL WELD OVERLAY
9	DOOR FACE SEAT	LT BRONZE / SS / RUBBER NICKEL WELD OVERLAY
10	BUSHES	LT BRONZE
11	BOLTS / STUDS & NUTS	CARBON STEEL
12	BY-PASS ARRANGEMENT	SUITABLE SIZE OF SLUICE VALVE (IS: 14846)

DESIGN FEATURES	
SIZE RANGE	500 mm to 1500 mm
PRESSURE RATING	PN 1.0, PN 1.6 & PN 2.0
DESIGN STANDARD	IS: 5312 Part-1, BS: 1868, AWWA C508
TESTING STANDARD	IS: 5312, API 598
FLANGE STANDARD	BS / IS / ANSI / DIN
MATERIAL	CI / DI / CS / SS
ACCESSORIES	By-pass arrangement

HYDROSTATIC TEST PRESSURE (Kg/Cm ²)		
RATING	BODY	SEAT
PN 1.0	15	10
PN 1.6	24	16
PN 2.0	30	20

DIMENSION TABLE

SL. No.	SIZE	FACE TO FACE	FLANGE DIA	FLANGE THICKNESS	PCD	NO. OF HOLE	HOLE DIA

ALL DIMENSIONS ARE IN MM.